

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
24 June 2004 (24.06.2004)

PCT

(10) International Publication Number
WO 2004/052709 A1

(51) International Patent Classification⁷: **B62B 1/26**, 1/14

(21) International Application Number:
PCT/GB2003/005342

(22) International Filing Date: 8 December 2003 (08.12.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0228615.1 7 December 2002 (07.12.2002) GB
0319791.0 22 August 2003 (22.08.2003) GB

(71) Applicant (for all designated States except US): **FORT KRUIWAGENS BV** [NL/NL]; Simon Stevinstraat 6, NL-4004 JV Tiel (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **COX, Gordon,**

Clarell [GB/GB]; 12 Dover Close, Rushden, Northamptonshire NN10 ORQ (GB). **COX, Michael, Andrew** [GB/GB]; 12 Dover Close, Rushden, Northamptonshire NN10 ORQ (GB).


(74) Agent: **BROOKES BATCHELLOR LLP**; 102-108 Clerkenwell Road, London EC1M 5SA (GB).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

[Continued on next page]

(54) Title: TROLLEY DEVICE

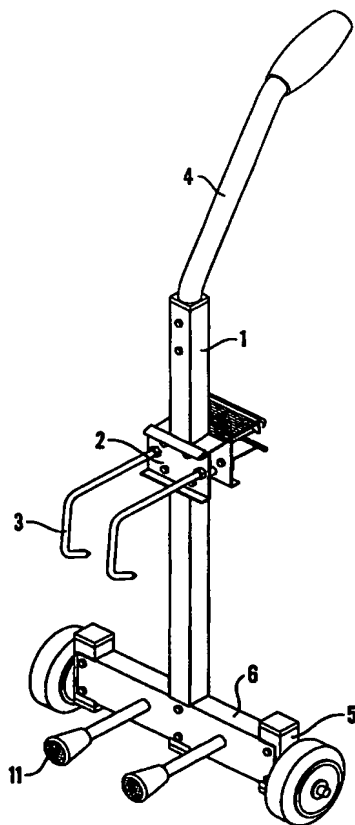

(57) Abstract: A trolley device capable of lifting and moving an open topped container, comprising a body part having handle means and means which permit movement of the device along a surface, the body part having primary container-contactable means including at least one container-contactable part located above ground level when said body part is upright which can engage a lower external side of such a container, and secondary container contactable means including at least one container-contactable part spaced above the said primary contacting means when said body part is upright and which can engage an upper internal side of the container, said body part capable of pivoting about the said means which permit movement to raise both said container-contactable means.



ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments*

Published:

— *with international search report*

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*